



TEMPERATURE PROBES with RTD Ni1000/6180ppm sensor tolerances $+(0.15+0.002t)$




air probe -30 to +80 °C with male connector Cinch for direct insertion to connector of Commeter type 100-60


Do not use in new applications - will be replaced by Pt1000 probes




multipurpose watertight (IP67) probe with cable of specified length, range -50 to +200 °C. Available with cable lengths 1, 2, 5, 10 or 15 meters - please specify type N1ATG8/0 - cable with tin coated wires
type N1ATG8/C - cable with male connector Cinch for Commeter
type N1ATG8U/C - multi purpose watertight (IP67) probe -30 to +80 °C with the PVC cable. Available at the cable length 5, 10 or 15 meters. For T-PRINT dataloggers.




brass surface probe with cable of specified length, range -30 to 200 °C. Mounting by a M4 screw or fixing by a self adhesive tape. Available with cables 1, 2, 5, 10 or 15 meters - please specify.
type N1ATG7/0 - cable with tin coated wires
type N1ATG7/C - cable with male connector Cinch for Commeter

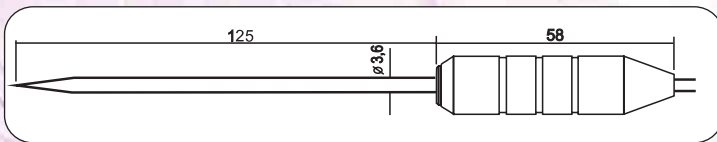


hand-held pointed tip probe -30 to +200 °C for food industry, teflon handle, cable length 1 meter
type 0061-200/0 - with tin coated wires
type 0061-200/C - with male connector Cinch

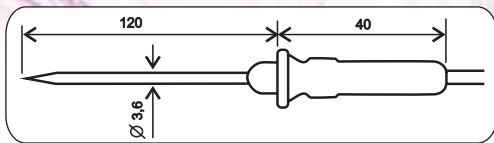

hand-held pointed tip probe -30 to 220 °C, 1 meter cable
type 301-220/0 - with tin coated wires
type 301-220/C - with male connector Cinch




miniature surface probe -10 to +60 °C with Cinch male connector for direct insertion to Commeter instruments type 031-60

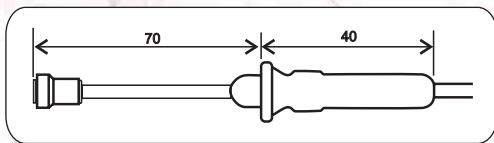


direct surface probe -30 to 150 °C, 1 meter cable
type 031-150/C - with male connector Cinch



surface probe for tubing and flat surface range -30 to +130 °C, cable length 2 meters
type NS151-2/0 - with tin coated wires
type NS151-2/C with male connector Cinch

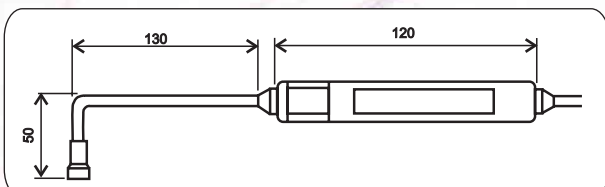

right-angled surface probe -30 to 150 °C, 1 meter cable
type 032-150/C - with male connector Cinch

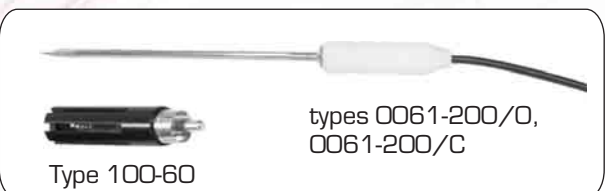

Type 100-60

types 0061-200/0,
0061-200/C